


INDUSTRIAL MILL DIMENSIONS — Inches

MODEL	HP	RPM	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	U	OUTLET	ESTIMATED WEIGHT/LB
IE-22115	25-60	3600	47	25.0	70	12.2	18	22	33.0	12	13.0	10	10.75	11.5	6	24	20.0	2.4375	18x11.625	2,200
IE-2215	30-75	3600	47	25.0	72	15.1	18	22	33.0	10	15.0	10	14.25	15.0	6	24	22.5	2.4375	18x15.125	2,600
IE-2220	50-100	3600	47	25.0	76	17.6	18	22	33.0	10	15.0	10	19.25	20.0	6	24	27.5	2.4375	18x20.125	3,000
IE-2224	60-125	3600	47	25.0	78	19.7	18	22	33.0	8	17.0	10	23.00	24.0	6	24	31.5	2.4375	18x24.125	3,400
IE-2230	60-150	3600	47	25.0	82	22.7	18	22	33.0	8	17.0	10	29.00	30.0	6	24	37.5	2.4375	18x30.125	3,750
IE-38115	40-100	1800	64	33.4	72	16.3	30	36	49.5	18	15.4	12	10.75	11.5	8	38	20.0	2.9375	30x11.625	4,000
IE-3815	60-150	1800	64	33.4	76	18.1	30	36	49.5	18	15.4	12	14.25	15.0	8	38	22.5	3.4375	30x15.125	4,600
IE-3820	75-200	1800	64	33.4	88	20.7	30	36	49.5	18	15.4	12	19.25	20.0	8	38	27.5	3.4375	30x20.125	5,400
IE-3824	100-200	1800	64	33.4	98	22.7	30	36	49.5	18	15.4	12	23.00	24.0	8	38	31.5	3.9375	30x24.125	6,000
IE-3830	125-250	1800	64	33.4	110	25.7	30	36	49.5	16	17.4	12	29.00	30.0	8	38	37.5	3.9375	30x30.125	6,800
IE-3836	200-350	1800	64	33.4	118	28.8	30	36	49.5	16	17.4	12	35.00	36.0	8	38	43.5	4.4375	30x36.125	7,800
IED-3840	200-400	1800	64	33.4	124	31.1	30	36	49.5	16	17.4	12	39.50	40.5	8	38	47.5	4.4375	30x40.75	8,900
IED-3848	250-400	1800	64	33.4	136	35.4	30	36	49.5	16	17.4	12	47.50	48.5	8	38	*	4.9375	30x48.75	10,000
IED-3860	250-500	1800	64	33.4	152	41.4	30	38	49.5	16	17.4	12	59.50	60.5	8	38	*	5.4375	30x60.75	11,000
IE-44115	50-100	1800	74	37.0	72	16.3	36	42	56.5	22	15.5	12	10.75	11.5	8	44	20.0	2.9375	36x11.625	4,500
IE-4415	75-150	1800	74	37.0	76	18.1	36	42	56.5	22	15.5	12	14.25	15.0	8	44	22.5	3.4375	36x15.125	5,000
IE-4420	100-200	1800	74	37.0	88	20.7	36	42	56.5	20	17.5	12	19.25	20.0	8	44	27.5	3.4375	36x20.125	6,100
IE-4424	125-250	1800	74	37.0	98	22.7	36	42	56.5	20	17.5	12	23.00	24.0	8	44	31.5	3.9375	36x24.125	6,500
IE-4430	150-300	1800	74	37.0	110	25.7	36	42	56.5	20	17.5	12	29.00	30.0	8	44	37.0	3.9375	36x30.125	7,500
IE-4436	200-350	1800	74	37.0	118	28.8	36	42	56.5	18	19.5	12	35.00	36.0	8	44	43.5	4.4375	36x36.125	8,800
IED-4440	250-400	1800	74	37.0	124	31.1	36	42	56.5	18	19.5	12	39.50	40.5	8	44	47.5	4.4375	36x40.75	9,400
IED-4448	250-450	1800	74	37.0	136	35.4	36	42	56.5	18	19.5	12	47.50	48.5	8	44	*	4.9375	36x48.75	11,500
IED-4460	300-600	1800	74	37.0	152	41.4	36	44	56.5	18	19.5	12	59.50	60.5	8	44	*	5.4375	36x60.75	13,500

ELIMINATOR

Hammermills — Screw Feeders — Rotary Feeders
 Self Cleaning Magnet Adapters — Magnets — Air Systems
 Spouting — Shredders — Choppers — Screens
 Hammers — Electric Motors

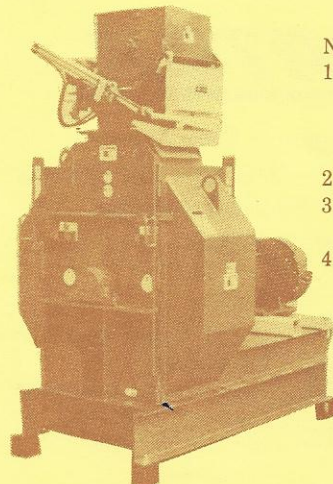

NOTES

1. VOID dimensions L-M-N on gravity discharge hammermills. Above dimensions are in inches and subject to change without obligation or notice.
2. Certified prints are available on request.
3. Air pan (L-M) may be flanged across or lengthwise the hammermill.
4. *To be determined by type of door opening selected.

BLISS
INDUSTRIES, INC.

1415 W. Summit Ave.
 P.O. Box 910
 Ponca City, Oklahoma 74602
 Phone (405) 765-7787
 FAX (405) 762-0111