



COUNTERFLOW COOLER




COUNTERFLOW COOLER


GENERAL DESCRIPTION

The unique features of our **COUNTERFLOW COOLERS** gives them an undeniable competitive advantage. The internal rotary airlock allows for a more compact unit while the combination of the extractor design and air suction duct allows for an even spread of the cooling air without lifting product. Tough-built, trouble-free and affordable, they give the user an excellent return on investment as well as a superior quality product.

MATERIAL AND AIR FLOW FEATURES

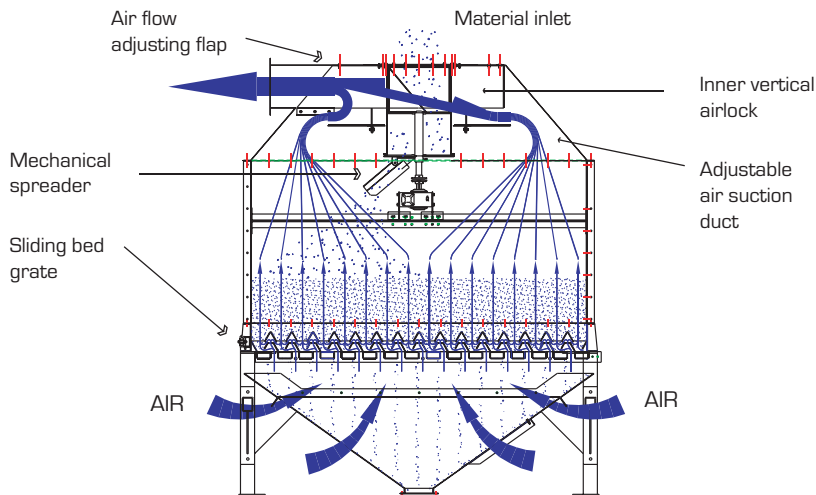

EXTRACTOR OPERATION

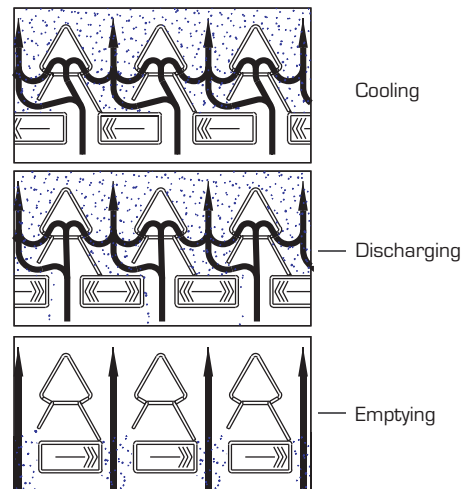

MODEL *	CFM **	OVERALL DIMENSIONS (in)	MAX CAPACITY MTPH
VC-59	5000	66 x 64 x 93	7
VC-71	7000	78 x 76 x 98	10
VC-83	9000	92 x 90 x 120	13
VC-95	12500	104 x 102 x 123	18
VC-107	15500	116 x 114 x 133	22
VC-119	20000	130 x 126 x 147	30
VC-131	24000	157 x 138 x 155	36
VC-143	35000	180 x 150 x 187	50

* Other models available [VR series]. ** Variable according to given commodity.

Electric, hydraulic or pneumatic grate drive available.



Control Panel [optional]



Air Damper [optional]



Inspection Ports [optional]

LIMITED GUARANTEE

Our equipment is carrying a one year warranty on parts and labour.

Printed in Québec, Canada



www.lmm.info

Toll free : 1 800 461-6276